


FYLDE MICRO

Compact Two Channel MPT Trunking System, Incorporating Full Specification Repeaters

Available in frequencies 136-174 | 400-470 Mhz
2 radio channels in a 3u chassis
Optional - Telephone connect

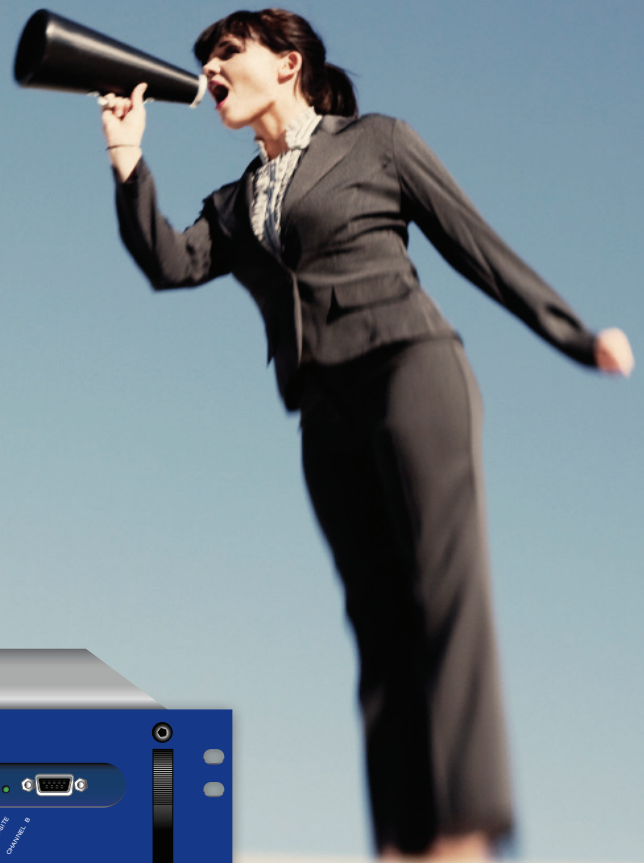


The New Language in
Low Cost Communications

LINGO


Instantly Deployable

This Ultra-Low Cost solution brings MPT1327 professional quality trunked radio to the smaller user. Shopping centres, Sports Stadiums, Factories and Warehouses, Air-fields and construction sites, in fact anywhere that requires localised, fast reliable communications.

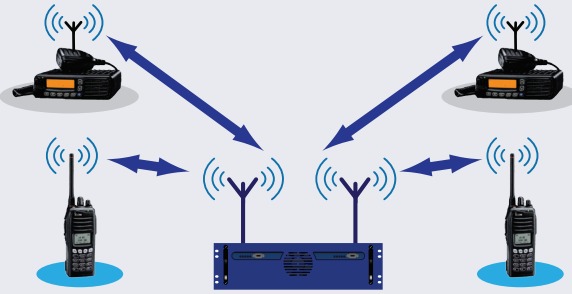

Fast Installation

- Plug & Play Design
- Space Saving Rugged 3u Chassis

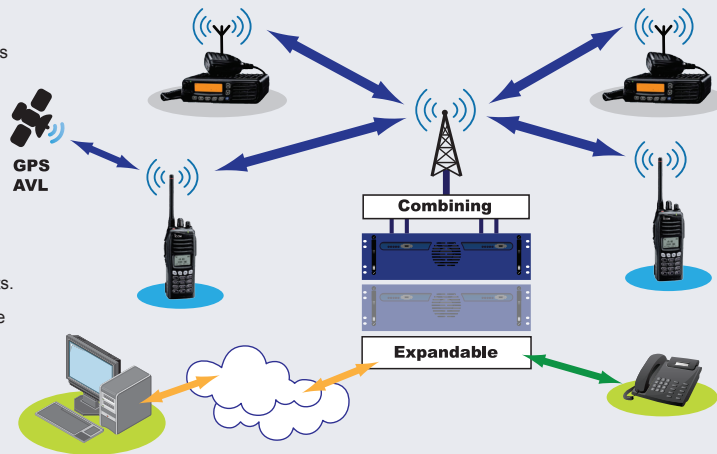

Expandable

- Compatible with all Fylde products.
- Up to 24 channels on a single site

Specifications

- 2 Channel Full Spec Repeater & MPT1327 Controller
- Calling Types | Emergency + Normal + Priority
- Call queueing | Fully automatic
- Options | Telephone connect
- Ultra low cost of installation
- Frequency range | 136 - 174MHz / 400 - 470MHz
- Repeater output power | 25 Watts 100% duty cycle
- Operational temperature range | -25oc to +55oc
- Power supply voltage | 110V - 240V AC - (12V Option)
- Weight | 12.5 Kg (approx.)



Dimensions (3u form factor)

